

# **Table of Contents**

EXECUTIVE SUMMARY	3
OVERVIEW	4
KEY RESEARCH FINDINGS	6
SURVEY FINDINGS	8
Participant Profile	8
DEPARTMENTS AND JURISDICTIONS	
CODE VIOLATIONS	15
Plans	16
Field Inspections	
Plumbing	19
Mechanical/Fuel Gas System	
Electrical	
Energy	22
Exterior Deck Code Violations	23
Common Life Safety	24
Flashing	25
Foundation	
Framing – Wall	27
Framing – Floor	
Truss-Related	
Roof Covering	
Window or Door	
Handrails, Guardrails, Stairs	
INDIRECT CODE VIOLATION CAUSES	
TYPES AND PERCENTAGES OF NEW HOMES WITH CODE VIOLATIONS	32
APPENDIX A - 2018 COMMON CODE NONCOMPLIANCE SURVEY	33

## **EXECUTIVE SUMMARY**

In November 2018 the International Code Council and the National Association of Home Builders (NAHB) conducted a joint survey to code officials across the U.S. as part of their ongoing effort to improve the quality of construction in residential and commercial buildings. This survey was a follow-up to similar surveys deployed in April 2006 and December 2012. The purpose of the surveys was to highlight for builders, remodelers, and code officials items most likely to be flagged during construction. This information should prove valuable in helping builders and remodelers focus more intently on these potential problem areas before and during construction, thereby contributing to the overall satisfaction of their customers and also saving time during construction.

It is difficult to make specific comparisons from survey to survey based on the changes in questions and details required from the respondents. But the following broad points can be made.

- 1. Technology has made some inroads into the development, review, and issuance of construction plans. Although there seems to be more that can be accomplished to increase the efficiency and effectiveness of the processes.
- 2. In general, here are some issues that report mixed improvement results from survey to survey:
  - Common grading and site drainage
  - Windows continue to be an issue
  - Electrical grounding and bonding violations have increased
  - Most railing and guard rail issues have decreased
  - High percentage of life safety issues
- 3. There is an indication of a rising trend in new home code violations on apartments, townhouses, condominiums, and custom high-end homes (See graph on page 32 for specifics).

Future surveys with the same scope will ensure a level of consistency that will help identify on-going problems and successes for the industry.

February 2019 Page 3 of 46

## **OVERVIEW**

This 2018 survey builds upon data generated by the 2006 and 2012 surveys. The survey questions were not designed to count problems, but to identify specific areas during construction on which builders need to focus. Consequently, all problems noted in the survey are ones that require correction *before* a certificate of occupancy can be issued.

Goals of the survey include:

- Highlighting common code violations frequently found during construction.
- Providing builders with a method to reduce overall project costs by focusing more attention to the problem areas identified in this survey so corrections may be made while the trade contractors are performing their work
- Identifying those areas within the design and construction phase that most often result in building code violations, which allows builders to proactively manage their project.
- Providing clearer guidance for manufacturers in the preparation of their specifications and building designers in the preparation of their design documents.

Code officials from jurisdictions of various sizes were invited to take part in a 10-minute survey online hosted by the Code Council.

Note that the data below shows a year to year increase in survey invitations issued, but a static return rate. This then has caused a significant reduction in response rate percentage. Also, note that the number of responses is exactly the same from 2006 to 2012, and only 100 fewer in 2018. This suggests repeat responders even with the significant increase in potential targeted responders.

Year of Survey	2006	2012	2018
Invitations Issued	4,895	6,265	11,400
Responses Received	1,260	1,260	1,165
Percentage (%) Response	26%	20%	10%
Rate			

Although 1,165 responses were received for the 2018 survey, the response rate of 10% is half that of the 2012 and the 2006 survey. By marketing research industry standards, the 10% response rate represents the low end of expected responses.

Survey sample size was based on these two major factors:

- 1. Level of confidence required. In this survey a level of 95% (.05) was required.
- 2. Required Margin of Error per answer was  $\pm 4$ .

Question to question the survey had up to a 10% variation in responder answers. The survey standard deviation (sd) for number of completed responses was 119; with a low of 779 responses for Question 22 (Select up to the three (3) of the most common flashing violations most apparent in homes), and a high of 1,165 for Question 1 (Provide the state and zip code for your office location).

Based on the invitations issued (11,400) and the respondent sample size (1,165), the standard deviation of 119, the allowable margin of error (4), and the level of confidence required (95%; .05), the minimum number of required survey responses was approximately 800.

February 2019 Page 4 of 46

While the number of respondents (1,165) was an overall percentage drop compared with previous years, 1,165 respondents was still much greater than the sample size required (800) and sufficient to be statistically significant.

This year's survey has had a number of changes, including: changed questions, questions removed, question sequence reordered, and the survey analysis streamlined to provide easier use and interpretation of the data. Many subsets of the data have been reduced or eliminated to provide clearer meanings and analysis of the results.

February 2019 Page 5 of 46

# **Key Research Findings**

The following is a summary of key findings that emerged from the research and that are outlined in this report.

- The majority of respondents have a long tenure in code enforcement.

  Similar to 2006 and 2012 survey respondents, 2018 survey respondents have a long tenure in code enforcement. The majority (70%) have been in code enforcement for more than 10 years, and approximately 53% for 16 or more years.
- Survey respondents are primarily building officials who work in city level departments. Although most of the respondents serve in cities, almost half also work in small population areas of under 50,000. The building official title has dropped to just above 41% from 46% in 2012 and 48% in 2006. There has also been a rise of "Other" titles to almost 13%.

Of note is that combined the "Fire Official" and "Fire Inspector" titles have decreased to 14%. This is down from the 2012 survey of 16%, but still double the combined percentage of 7% in 2006. The building inspector title also fell from 27% (2006, 2012) to 18%.

 Participants' departments offer and perform a multitude of inspections for commercial and residential construction.

Respondents' departments offer field inspections, plan reviews, and pre-construction meetings. Over one-half of departments also offer electronic plan submittal. Additionally, just over two-thirds (68%) allow plans, permit applications, or other documents to be submitted electronically for review.

Ninety percent of the departments performed final building inspections. These inspections were all performed by over 75% of the respondents: ready to occupy, rough framing, footing, foundation, mechanical final, fire resistance rated construction, and underground plumbing. In addition, over half of respondents use the 2015 version for all the International Codes (I-Codes).

 The time spent working on residential versus commercial construction and code violations was about evenly divided.

Slightly more time is dedicated to commercial construction than residential (42% - commercial to 40% - residential). This is a reversal from the 2012 survey findings. There was also a significant increase (33%) in other construction.

Code violations have shown an overall upward trend.

Forty-eight percent of respondents indicated there was a slightly lower frequency of commercial plan denials (49%); where 50% of the respondents indicated that about 51% of residential plans were denied due to code violations. This is an upward trend compared to the 2012 survey average of 45% for commercial.

Field inspections have shown mixed results.

The three most frequently found code violations in field inspections were: fire resistance-rated construction (53%), structural (50%), and accessibility (38%). Fire resistance rated construction was not evaluated in the 2012 survey.

However structural and accessibility field inspection code violations were down 10% and 6% respectively in 2018, and the third highest field inspection code violation for 2012 (electrical at 41%), did not make the three most frequently found field inspection violations in 2018. **Note:** Electrical field inspection code violations were found at 35% in 2018, down from 41% in 2012.

February 2019 Page 6 of 46

- Indirect causes for code violations show a slight increase based on respondents' opinions. When asked to rate on a scale of 1 (lowest impact or no impact) to 6 (highest impact), a list of causes based on their impact resulting in code violations, the respondents indicated the following:
  - o "Workers ignoring the manufacturer's installation instructions" (4.81) was the greatest cause of code violations.
  - o "Inadequate manufacture's installation instructions" (2.95) was rated as the least cause of code violations.

Both of these scores were above the 2012 survey of 4.22 for "Workers ignore manufacturer's installation instructions" and 2.77 for "Inadequate manufacturer's installation instructions".

 All types of new homes with code violations have significantly increased compared to the last survey.

A significantly higher number of respondents found all types of new construction to have code violations (over 60%).

This is an upward trend of over 17% from the highest respondent code violation of 2012 (44%) to the lowest respondent rating of code violation in 2018 (61%).

Specific examples include:

The highest percentage of respondents found new construction of apartments, townhouses, and condominiums as having code violations (90%). This was a significant increase above the 2012 survey results of 43%. New construction of high-end (expensive) homes was also significantly higher (88%) than the 2012 survey (35%).

February 2019 Page 7 of 46

# **Survey Findings**

#### **Participant Profile**

Select the number of years you have been in code enforcement:				
Survey Year *	2012	2018		
Sample Size	1,121	1,169		
0-2 years	5%	6%		
3-5 years	6%	13%		
6-10 years	21%	11%		
11-15 years	21%	17%		
16 or more years	47%	53%		


<sup>\*</sup>Note: 2006 Survey data not available


Similar to 2012 survey respondents, 2018 survey respondents have a long tenure in code enforcement. The majority (70%) have been in code enforcement for more than 10 years, and approximately 53% for 16 or more years.

Which of the following titles best describes your position at your building department?				
Survey Year	2006	2012	2018	
Sample Size	*	969	1,159	
Building Official	48%	46%	42%	
Building Inspector	27%	27%	18%	
Plan Reviewer	8%	11%	13%	
Fire Official	4%	9%	10%	
Fire Inspector	3%	7%	4%	
Other	11%	N/A*	13%	

<sup>\*</sup>Note: Survey data not available

Similar to 2006 and 2012 survey respondents, the 2018 participants are primarily building officials (41.5%). The number of respondents that are building inspectors has dropped below 20%, and the other category has increased to almost 13%.

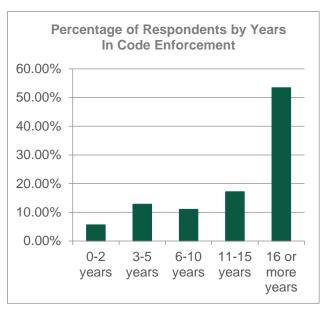


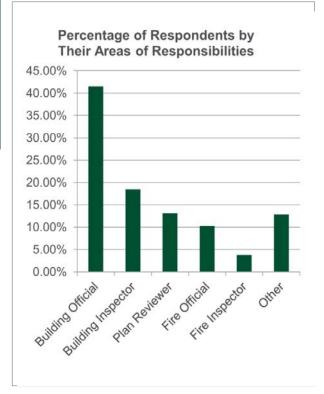

February 2019 Page 8 of 46

The respondents of the 2018 survey indicated that the primary Council Code certifications they held are Residential Building Inspector (55%), Commercial Building Inspector (47%), and Building Plans Examiner (38%).

All of these percentages of Council Code certifications are down several points from the 2012 survey. (\*Note: No 2006 survey data available).

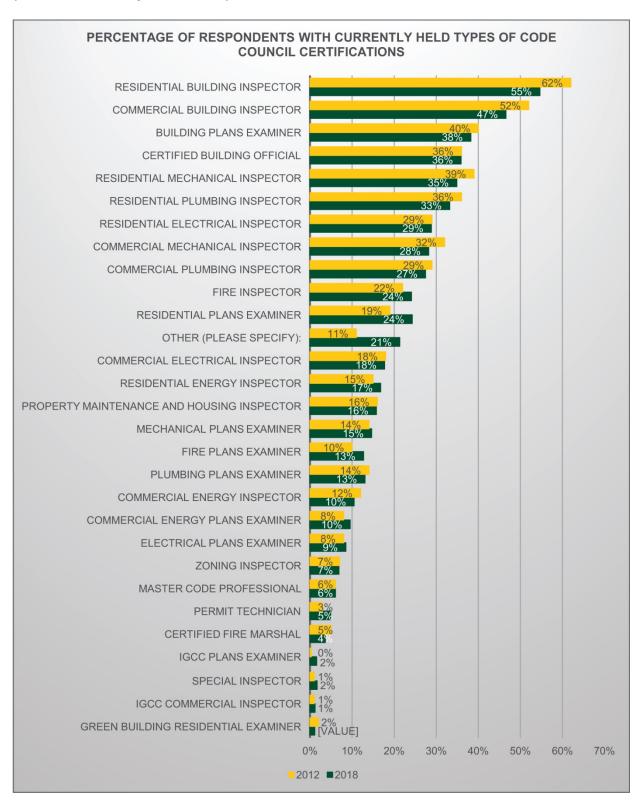


February 2019 Page 9 of 46

Which of the following choices best describes your department's level of authority?						
Survey Year 2006 2012 2018						
Sample Size	N/A*	1,006	1,165			
City level	73%	71.8%	71.47%			
County level	18%	24%	17.59%			
State level	8%	5.7%	5.52%			
Federal level	1%	0.8%	0.09%			
Other (please specify):	N/A*	N/A*	5.34%			

Like the 2006 and 2012 surveys, the majority of participants (71%) work in a department with authority at the city level. The county level of authority has decreased to the 2006 level (18%). Of note is the other category at just over 5%.

\*Note: Survey data not available

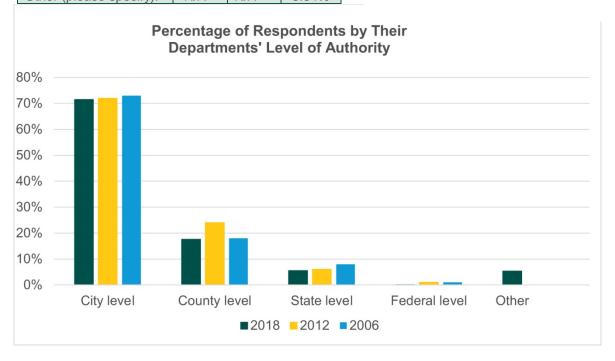


February 2019 Page 10 of 46

Which is the approximate population of the jurisdiction in which you work?

Survey Year	2018	# of Responses	2012	# of Responses	2006	# of Responses
Under 50,000	48%	553	52%	543	56%	706
50,000 to 149,999	25%	294	25%	261	21%	264
150,000 to 999,999	20%	230	18%	188	15%	189
1,000,000 or more	7%	82	5%	52	8%	101

The majority of survey respondents work in a jurisdiction with a population under 50,000; this has declined by 5%. One-quarter (25%) have a population of 50,000 to 149,000. A growing number (7%) have a population of one million or more.

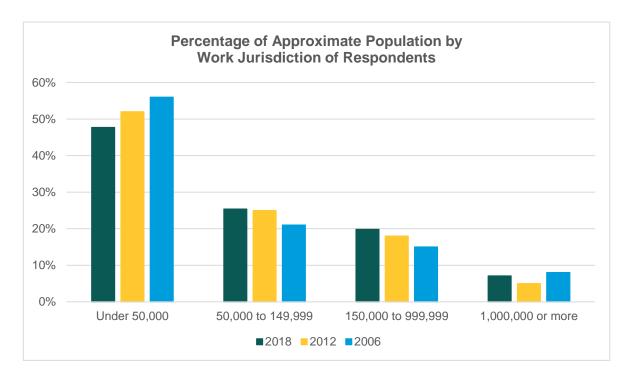


February 2019 Page 11 of 46

## **Departments and Jurisdictions**


Code officials were asked to identify the types of services that are provided by their department. Almost all respondents (98%) said they provide field inspections, and almost as many (97%) indicated they provide plan reviews. Additionally, a majority of respondents (89%) provide pre-construction meetings.


Well over half (68%) of respondents' building departments allow plans, permit applications, or other documents to be submitted electronically for review. This is a significant increase over the 51% from the 2012 survey.

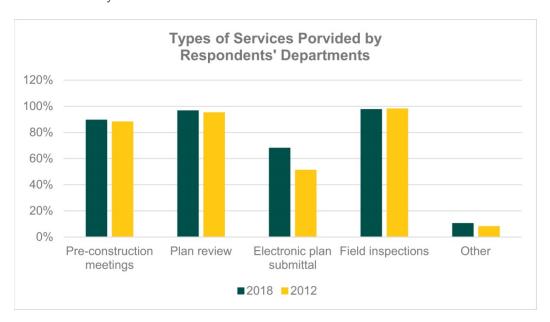

\*Note: No 2006 Survey data not available

The following data indicates the percentage of building departments that allow review of electronically submitted plans, permit applications, or other documents.

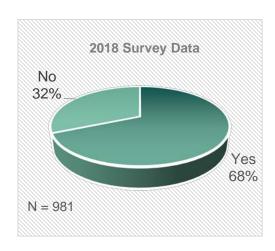


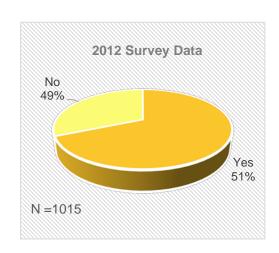

February 2019 Page 12 of 46

Survey respondents were asked to indicate what version of the I-Codes are used in their jurisdictions. Over half of all respondents said their jurisdiction was using the 2015 version of all the I-Codes.


The four codes that garnered the highest usage by respondents were: International Existing Building Code (67%); International Swimming Pool and Spa Code (67%); International Fire Code (64%); and the International Wildland-Urban Interface Code (63%).

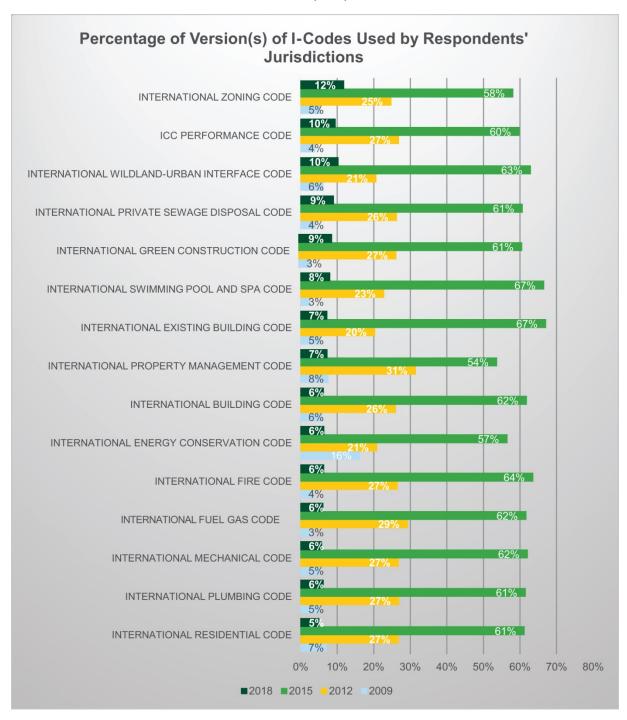

When respondents were asked to indicate what types of inspections are performed by their departments, most all (90%) said the building final is performed. Rough Framing (81%) and Use and


February 2019 Page 13 of 46

Occupancy Inspections (81%) tied for second place. These inspections represent a substantial change from 2012 when Building Final Inspections was 95%, and all of the following very common inspections were performed at or over 82% by the respondents: Footing, Foundation, Mechanical Final, and Underground Plumbing. The only other inspection to be performed above 80% on this survey was Fire Resistance Rated Construction (80%). Drywall inspection was replaced as the lowest inspection performed by Exterior Roof Deck Nailing (pre-underlayment), (43%). This inspection and Exterior Wall Lath/Cladding Ties were the only inspections performed below 50% by respondents on the 2018 survey.

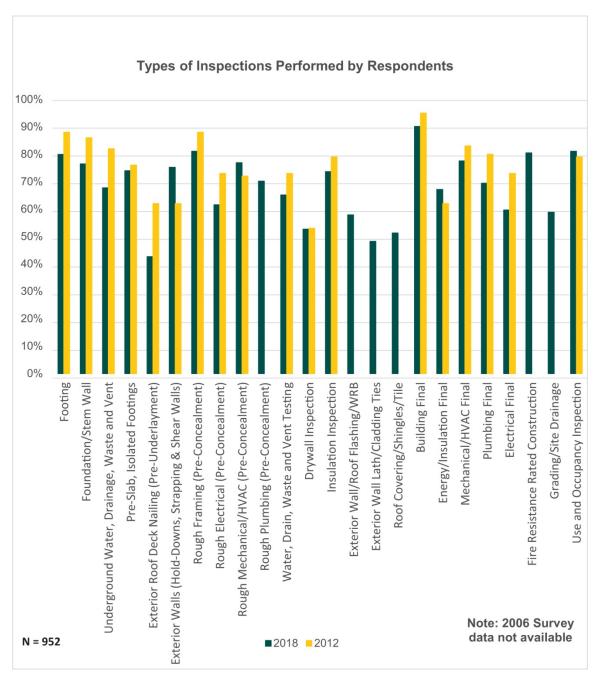

February 2019 Page 14 of 46

Slightly more time is dedicated to commercial construction than residential; 42% compared to 40%. This is a reversal from the 2012 survey findings. Also, note this survey showed a 33% increase in time spent on other construction.

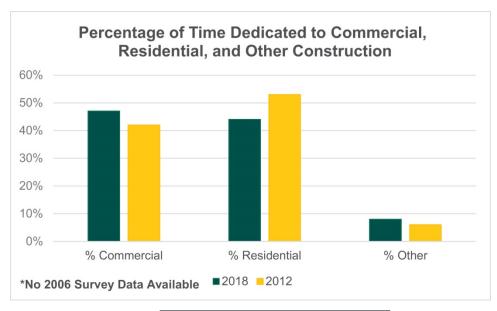

	2018	2012
Commercial	N = 977	847
Residential	N = 944	835
Other	N = 423	402

#### **Code Violations**


This section compares individual results of field inspection data and code violations from the 2006, 2012, and 2018 surveys. Due to question and grouping changes from survey year to survey year, some of the data has not been acquired or has been rolled up into different groupings. This prevented specific survey to survey comparisons on some field inspection and code violation data.

Because of question differences and groupings, only one grouping could be overlapped for all three surveys, (structural). The detailed breakout by building elements (when possible) is included in the individual categories of code violations in this section (**CODE VIOLATIONS**).

The individual code violation areas are listed before each presentation of data specific to that code violation area. Comparison results between or among the surveys (if the data is available for that code violation) are also presented.


The graph below compares the percentage of respondents who reported code violations based on field inspections' data from the 2006, 2012, and 2018 survey results. **Note the graph also shows the relative difference among the common areas that were reported on in the surveys.** 

February 2019 Page 15 of 46

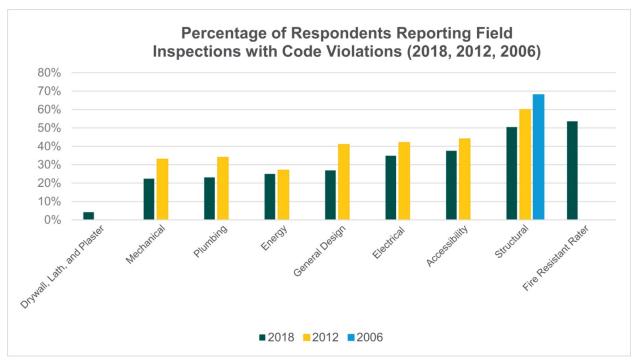

#### **Plans**

The chart below shows the respondents' ratings of how often plans are denied based on code violations. 2018 and 2012 residential and commercial respondent data is compared. The overall weighted averages of 2018 residential and commercial code violations have increased from 2012. In 2012, the overall weighted average for residential code violations was 33%; in 2018, it was 43%. A higher overall weighted average for commercial code violations was indicated between 2012 and 2018. 2012 had an overall commercial weighted average of 38%, in 2018, overall weighted code commercial code violations were 57%.

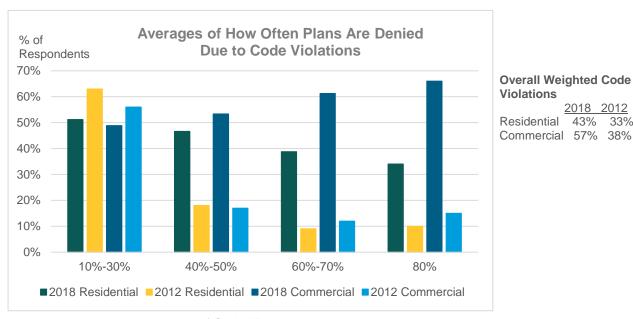


% of Code Violations

\*No 2006 Survey Data Available

Respondents indicated that *most* plan deficiencies were found in the areas of Accessibility (40%),

February 2019 Page 16 of 46

Means of Egress (32%), and Fire and Smoke Barriers/Partitions/Walls (32%). General Design was fourth (31%). These areas are quite different than the 2012 survey results. Improvement is most noted in General Design – a 30% drop; all areas of residential and commercial in the 2012 survey were above 60%.

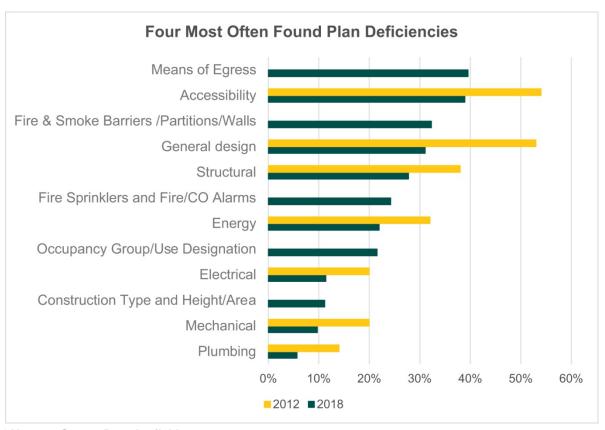


<sup>&#</sup>x27; No 2006 Survey Data Available

## Field Inspections

The next chart shows the respondents ratings of how often code violations are observed during field inspections. 2018 and 2012 residential and commercial respondent data is compared. The overall weighted averages of 2018 residential and commercial frequency of observed code violations during field inspections have increased from 2012. In 2012, the overall weighted average frequency for residential code violations during field inspections was 45%; in 2018, it was 48%. A higher overall weighted average for frequency of commercial code violations was also observed between 2012 and 2018. 2012 had an overall commercial weighted average of 39%; in 2018, the overall weighted commercial code violations found during field inspections was observed at 52%.

February 2019 Page 17 of 46

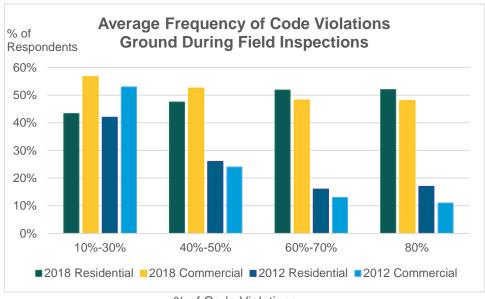

Overall Weighted
Frequency of Code
Violations

2018 2012
Residential 48% 45%

Commercial 52% 39%

% of Code Violations

Survey respondents were asked what three areas field inspections were most often deficient, and respondents indicated the following: Fire Resistance-Rated Construction (53%), Structural (50%), and Accessibility (38%) The table below compares the top three findings of this survey with the 2006 and 2012 survey results.

Comparison of Top 3 Deficient Field Inspection Areas					
Survey Year	2018	2012	2006		
Areas Deficient					
Fire Resistance-Rated	53%	N/A*	N/A*		
Construction					
Structural	50%	60%	68%		
Accessibility	38%	44%	N/A*		
Electrical	N/A*	41%	N/A*		

NOTE: \*No Data Available


Note that 2 of the 3 areas overlap from both the 2012 and 2018 surveys, and that the overlapped areas of structural and accessibility have both declined over the past 6 years.

The next chart shows just the 2018 survey responses to the same question as the table above, "In what three (3) areas are field inspections most often deficient?"

February 2019 Page 18 of 46

<sup>\*</sup> No 2006 Survey Data Available

Note that red arrow points to an area on the red line indicating that half of the field inspection deficiencies are found in the areas on the left of the point indicated by the arrow and half are in the areas on the right.

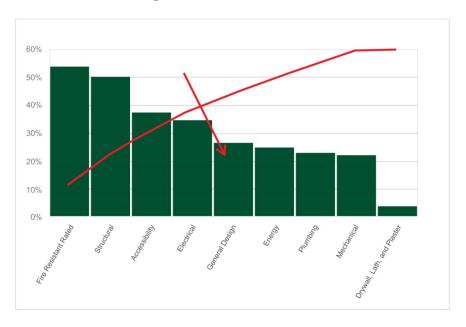

## **Plumbing**

Survey respondents were asked to identify the four (4) most common plumbing code violations they saw. Improper Notching or Boring of Framing was the most common with 51% of respondents saying they saw that plumbing violation. The three other top code violations sited were, Missing or Improper Nail Plates (44%), Pipes Improperly Supported (36%), with DWV Pipes Do Not Pass Leakage Test and Inadequate or Improperly Installed Venting both at (24%). These top 4 plumbing code violations match the top 4 violations of the 2012 survey. All plumbing code violations reported in this survey (2018) have significantly increased from 2012. The only exceptions are the lowest percentage responses, Pressure Reducing Valve Not In Place or Set Correctly and Cross Connections and/or Contamination (both down only 1% from 2012).

The Most Common Plumbing Code Violations			
Survey Year	2018	2012	2006
Improper notching or boring of framing	51%	41%	n/a
Missing or improper nail plates	43%	38%	n/a
Pipes improperly supported	36%	29%	n/a
DWV pipes do not pass leakage test	24%	19%	n/a
Inadequate or improperly installed venting	24%	21%	n/a
Improper use of fittings (turns, tees, etc.)	22%	18%	n/a
Missing or inaccessible cleanouts	15%	10%	n/a
Backflow device missing or not tested	14%	11%	n/a
Inadequate slope or grade provided for waste lines	14%	10%	n/a
Hot and cold supply reversed	5%	3%	n/a
Pressure reducing valve not in place or set correctly	3%	4%	n/a
Cross connections and/or contamination	3%	4%	n/a


Note: 28% of the respondents indicated this was not one of the field inspections they performed.

February 2019 Page 19 of 46

## Mechanical/Fuel Gas System

Survey respondents were asked to identify the 4 most common mechanical/fuel gas system violations. They were Improper Notching or Boring of Framing (37%), Inadequate Combustion Air or Makeup Air (34%), Improper Venting of Appliances (28%), and Inadequate Clearance to Combustibles (27%).

The chart below shows the common code violations of 2012 compared to 2018.

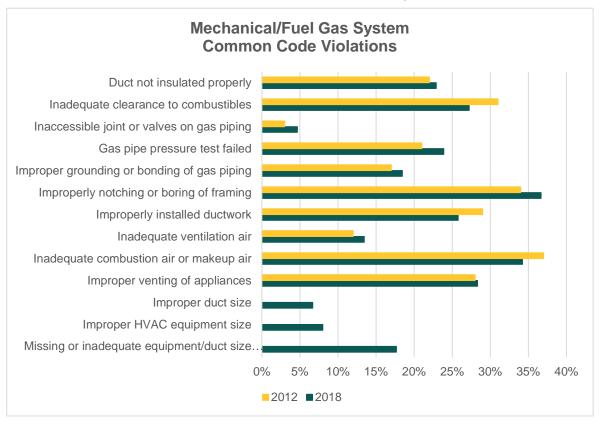


<sup>\*</sup>No 2006 survey data available.

February 2019 Page 20 of 46

#### **Electrical**

Survey respondents were asked to identify the four (4) most common electrical code violations. The four (4) most common were: Grounding/Bonding Issue (37%), Labeling of Circuits (31%), Working Space/Clearances (30%), and GFCI Protection (29%). Note that 6 of 13 questions on the 2018 survey do not match or are not included in the 2012 survey.

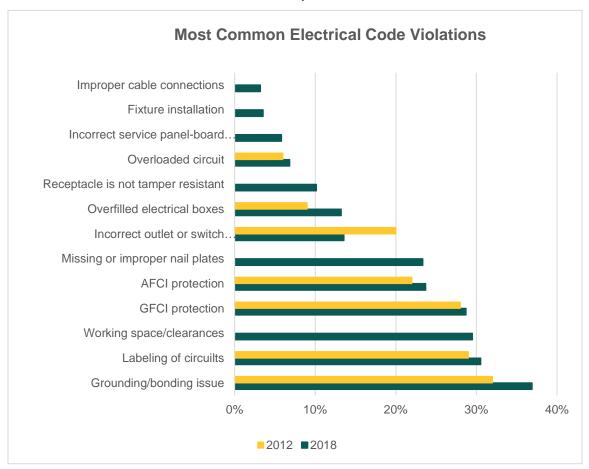

Note: 36% of the respondents indicated this was not one of the field inspections they performed. Note: No data for 2006

February 2019 Page 21 of 46

#### **Energy**

Survey respondents were asked to identify the four (4) most common energy code violations. The respondents reported the following: forty-two percent (42%) improper sealing of penetrations (e.g., electrical, ducts, venting), thirty-seven percent (37%) improper sealing of exterior walls, twenty-seven percent (27%) improper installation of insulation around wiring and plumbing passing through stud cavity and twenty-six percent (26%) percent improper insulation R-values walls/floors/ceiling/basement/slab/crawl space, were also among the 4 most frequently seen energy code violations.

## **Most Common Energy Code Violations**

Answer Choices	2018	2012
Improper sealing of exterior walls	36%	36%
Improper air sealing of penetrations (e.g. electrical, ducts, venting)	42%	N/A*
Improper insulation R-Values, wall/floors/ceiling/basement/slab/crawl	26%	15%
Improper performance path calculations	12%	N/A*
Improper installation of insulation around wiring and plumbing passing through stud cavity	27%	27%
Improper installation of insulation at ceiling joist at roof rafters	17%	14%
Improper installation of insulation in crawl spaces and slab on grade insulation	21%	19%
Improper U-factors/SHGC of windows	10%	N/A*
Improper duct sealing (visual)	24%	28%
Failed or missing duct tightness test	16%	N/A*
Improper duct installation	12%	14%
Insufficient high-efficiency lighting	8%	N/A*


\*NOTE: No data for 2006

Note: 27% of the respondents indicated this was not one of the field inspections they performed.

February 2019 Page 22 of 46

## **Exterior Deck Code Violations**

When survey respondents were asked to identify common deck-related code violations, two violations stood out among the rest. The majority of respondents said they saw improper or inadequate ledger connections to the house (59%) and improper guardrail or handrail installation (55%). Forty-two percent (42%) of respondents saw cases where the deck had improper lateral support and another 42% saw decks with improper post anchorage or post footings. Although the top two code violations are down by 3% and 5% respectively, lateral support violations were up 5% and post anchorage was new at 42%.

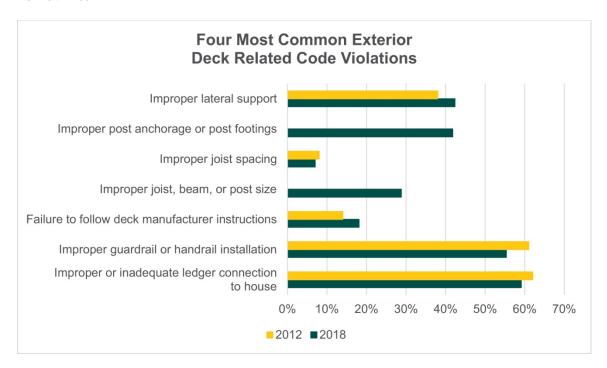


Note: No data for 2006

Note: 21% of the respondents indicated this was not one of the field inspections they performed.

February 2019 Page 23 of 46

## **Common Life Safety**

Respondents were asked to identify the four (4) most common life safety code violations they saw. Over half (56%) of respondents saw cases where there was a failure to install proper fireblocking in required hazardous locations and almost half saw cases of improper installation of draftstopping (48%). Only two of the top four most common code violations were listed on the 2018 and 2012 surveys. They were failure to install correct safety glazing in required hazardous locations (35%) and improper installation of smoke detectors (38%). The graph below shows the comparison for all the identified areas in both the 2012 and 2018 surveys.

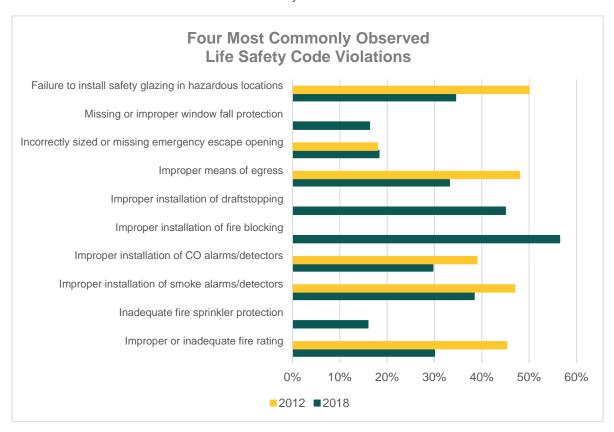


Note: 2006 survey did not have this category of data.

Note: Only 7% of the respondents indicated this was not one of the field inspections they performed.

February 2019 Page 24 of 46


## **Flashing**

Respondents indicated that flashing violations were the most apparent at the windows by over half (57%). Flashing violations were also apparent by half for the wood deck (51%), roof (44%), and chimney (42%). According to results, there is an apparent increase in flashing violations at the windows (51%, up from 49% in 2012, and 47% in 2006), wood deck (51% up from 38% in 2012, and 37% in 2006), roof (44% up from 36% in 2012, but down from 46% in 2006), and chimney (42%, up from 33% in 2012, and down 1% from 2006 of 43%).

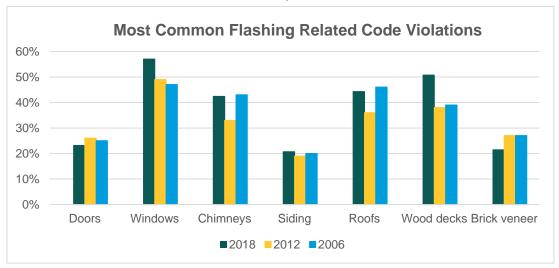

Note: Over 33% of all the respondents failed to answer if they performed this field Inspection.

Respondents indicated that flashing violations were most likely related to installation, according to two-thirds of respondents (68%). Eighteen percent (19%) said there were flashing violations with both the products and installation, and less than one percent had flashing violations with products. Results revealed very little change in flashing violations from 2012 to 2018 for installation. However, in 2006 installation violations were 82%, 14 percent higher than 2012 and 12 percent higher than 2018. Overall there has been a significant decrease in installation code violations while the product code violations have remained the same at 1% or less.

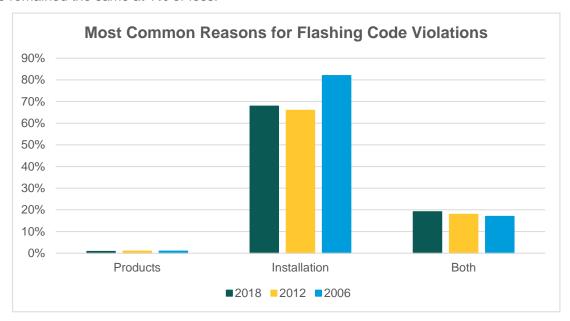


February 2019 Page 25 of 46

## **Grading and Site Drainage**

The most common grading and site drainage violations were erosion control measures not in place (42%), downspouts and drainage controls (42%), grading (41%), and grading too high (30%). Comparing results from 2012 revealed that there was only a percentage point or two difference between all the areas rated by the respondents. The only exception was: Over one-fourth of the 2018 respondents said this was not an area that they inspected for code violations.

Overall, all rated areas show a significant improvement trend from 2006 to 2018. Areas have from 1% to 21% improvement in code violations.

Note that red arrow points to an area on the red line indicating that half of the field inspection deficiencies are found in the areas on the left of the point indicated by the arrow and half are in the areas on the right.

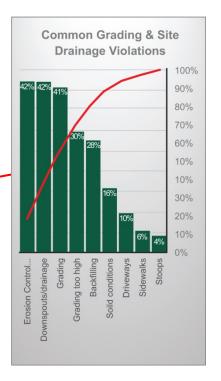

Select the Top 4 Most Common Grading and Site Drainage Violations You See.				
Survey Year	2018	2012	2006	
Sample Size	1,169	1,121	N/A	
Erosion Control Measures Not in Place	42%	43%	N/A	
Downspouts/drainage Controls	42%	38%	60%	
Grading	41%	42%	62%	
Grading Too High	30%	29%	42%	
Backfilling	28%	31%	48%	
Soil Conditions	16%	14%	18%	
Driveways	10%	7%	15%	
Sidewalks	6%	5%	7%	
Stoops	4%	4%	5%	

February 2019 Page 26 of 46

#### **Foundation**

The most common foundation-related code violations were improper reinforcement or support of rebar (52%), standing water/mud in footing or on rebar (47%), and improper anchor bolts (41%). The most noticeable difference in results revealed an increase of improper reinforcement or support of rebar (up 5% from 47% in 2012 to 52% in 2018, but still less than the 55% in 2006), standing water/mud in footing or on rebar (up 5% from 42% in 2012 to 47% in 2018), and improper foundation size (up 4% from 8% in 2012 to 12% in 2012, but still less than the 18% in 2006). Overall, all areas have improved since 2006. However, only "incorrect drain installation" has seen a reduced number of code violations since 2006 and 2012.

Select the Top 4 Most Common Grading and Site Drainage Violations You See.				
Survey Year	* 2018	2012	2006	
Sample Size	1,169	1,121	1,120	
Areas Deficient				
Improper reinforcement or support of rebar	52%	47%	55%	
Standing water/mud in footing or on rebar	47%	42%	N/A**	
Improper anchor bolts	41%	41%	53%	
Incorrect footing depth	35%	34%	37%	
Incorrect drain installation	21%	23%	38%	
Missing vapor barrier	20%	19%	28%	
Improper foundation size	12%	8%	18%	
Incorrect fasteners for use below grade to attach plywood	5%	4%	8%	

<sup>\*</sup>Note: over 35% of all the respondents indicated this inspection does not apply to their job.

## Framing - Wall

Respondents were asked to share the most common wall-related framing violations seen in buildings. Almost two-thirds of respondents (64%) see studs cut or notched to impermissible depth; this is a 7% increase over 2012. Missing fire-blockings (60%), missing hold-downs, straps, etc. (53%), and installation of braced or shear walls (48%) round out the top four violations.

Examining results from year-to-year (2006, 2012, and 2018) revealed all rated areas had a reduction in code violations. There was also a noticeable difference in violations from installation of braced or shear walls (up in 2018 by 36 points from 12% to 48%). All other categories had a mixed increase or decrease in violations from 2006 to 2012 and 2018.

Select the Top 4 Most Common Wall Framing Violations You See				
Survey Year	*2018	2012	2006	
Sample Size	1,169	1,121	1,120	
Areas Deficient				
Stud cut or notched to an impermissible depth	64%	57%	77%	
Missing fire-blocking	60%	63%	75%	
Missing hold-down, straps, etc.	53%	51%	59%	
Installation of braced or shear walls	48%	12%	N/A**	
Installation of sheathing	20%	17%	31%	
Improper spacing	8%	4%	10%	
Missing studs	8%	5%	9%	
Incorrect fasteners for use below grade to attach plywood	5%	N/A**	N/A**	

<sup>\*</sup>Note: over 35% of all the respondents indicated this inspection does not apply to their job.

February 2019 Page 27 of 46

<sup>\*\*</sup>No data available

<sup>\*\*</sup>No data available

#### Framing – Floor


The most common floor-related framing violations were notches in areas not permitted (62%), missing anchor bolts (43%), sheathing nails missing the joist (33%), and inadequate splices (29%). Nineteen percent of respondents reported a violation with the wrong joist size. This is an increase of 3% from the past six years. Inadequate splices were also up 3% from 2012. The other areas had no or only 1% variance. Of note was that the largest reduction in code violations from 2006 to 2018 was in sheathing nails missing joist (down 12%) and next was missing anchor bolts and notches/holes in areas not permitted; both had code violations down by 9% from 2006 to 2018.

Select the Top 4 Most Common Floor-Related Framing Violations You See				
Survey Year	*2018	2012	2006	
Sample Size	1,169	1,121	N/A**	
Areas Deficient				
Notches/holes in areas not permitted	62%	61%	71%	
Missing anchor bolts	43%	43%	34%	
Sheathing nails missing joist	33%	32%	45%	
Inadequate splices	29%	26%	27%	
Wrong joist size	19%	16%	22%	
Improperly installed sheathing	14%	15%	18%	
Wrong joist grade	7%	6%	12%	

<sup>\*</sup>Note: over 35% of all the respondents indicated this inspection does not apply to their job.

#### Truss-Related

The four (4) most common truss-related violations were when the permanent bracing was not installed (50%); truss not installed according to approval (46%); an improper connection to the wall plate (37%), a decrease of 18% from 2012 and a decrease of 20% from 2006; and an impermissible alteration leading to additional load (32%), a 10% decrease from 2012 and a decrease from 2006 of 28%.

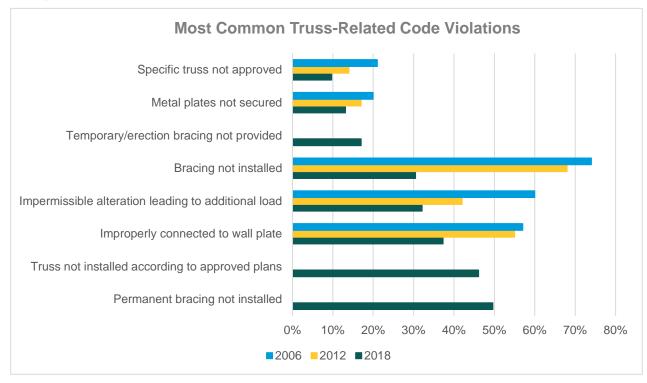


February 2019 Page 28 of 46

<sup>\*\*</sup>No data available


## **Roof Covering**

In the 2018 survey, absence or incorrect type of underlayment (34%) replaced the 2012 and 2006 surveys' number one finding of missing nails or fasteners (39% for 2012 and 49% for 2006). The remaining two of the top four areas were overdriving nails through shingles (29%) and improper materials (14%) of these top 4, improper materials (14%) increased slightly over 2006 (13% and absence or incorrect type of underlayment (34%) had an increase of code violations above 2012 (28%) and a 1% decrease from 2006 (35%).

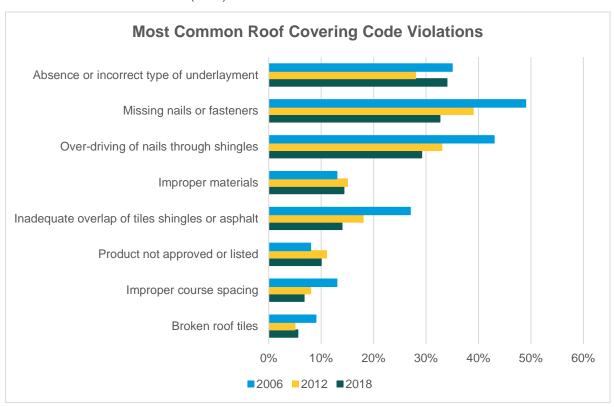

#### Window or Door

Improper flashing is the most common window or door related code violation seen by survey respondent, at 52%. This is an increase of over 16% from the 2012 (36%) and a decrease of 5% from the 2006 (57%) survey. Inadequate fire rating was 33%. This is also an increase of over 11% from 2012 and 2006 (22%). The third most observed violation was windows not properly fastened or installed (32%).

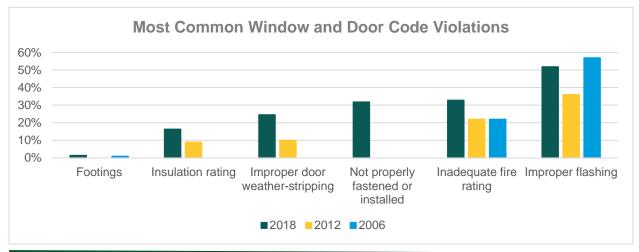


February 2019 Page 29 of 46

#### Handrails, Guardrails, Stairs


#### Handrails

The most common handrail-related code violations were improper height or spacing (60%), a 4% decrease from 2012 and an 11% decrease from 2006. Improper graspable surface (57%), a decrease of 3% from 2012 and 2006. The percentage of missing handrails (50%) was only 1% up from 2012 and down by 10% from 2006. The most noticeable difference from the 2012 survey is the decrease in not properly fastened or installed handrails. This violation was down 10% from 49% in 2012, and down 5% from 2006 to 39% in 2018.

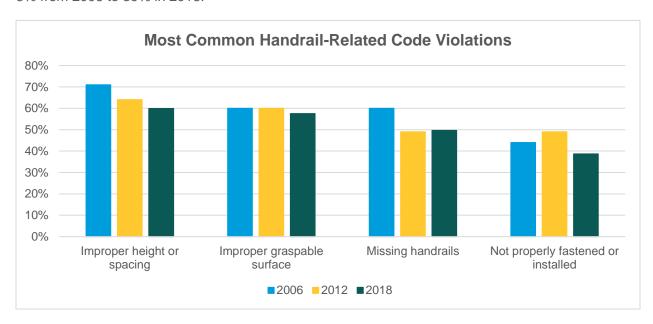

#### Guardrails


Survey respondents commonly saw three guardrail-related code violations at least 50% of the time. The most common violation was the guardrail opening too large, at 63%. Other violations were height criteria not met (56%) and the guardrail not properly fastened or installed (50%). The only guardrail-related code violation showing significant improvement since 2006 was a missing guardrail violation, down 10% in 2012. There was a slight increase (1%) in violations from guardrails not being properly fastened or installed.

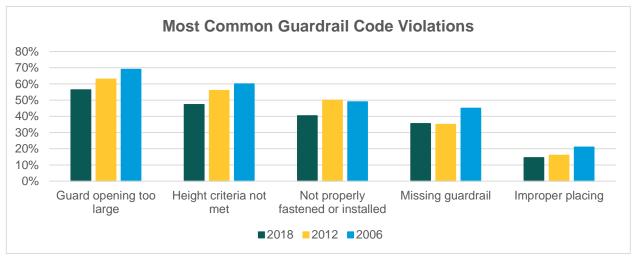

February 2019 Page 30 of 46

#### **Stairs**

Respondents were asked to rate the three most common stair-related code violations that they observed. Two of these code violations stood out to the survey respondents. Over two-thirds (68%) of respondents in all three surveys (2006, 2012, and 2018) said they saw stair rise and run violations. Just about half (49%) or more in all three surveys (2006, 2012, and 2018) still saw stair headroom violations. Both of these code violations were down from the 2012 levels by 4% and 3% and from 2006 by 10% and 14% respectively. The next highest area of code violation observed was improper stair construction (28%). This was a decrease from the 2012 survey of 37% and from 31% in 2006.

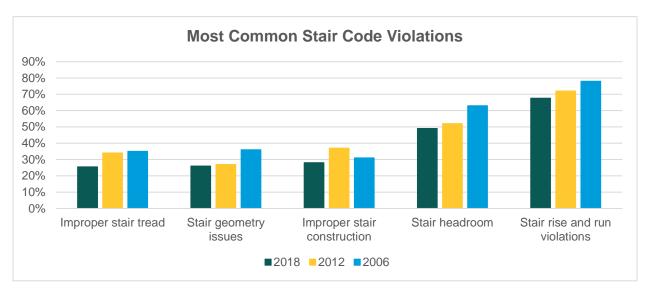


#### INDIRECT CODE VIOLATION CAUSES

NOTE: The following section is respondents' opinions only and has no 2012 supporting data.

2006 data is very general and would require a conversion scale for a consistent comparison.

Respondents were asked to express their opinions concerning how often the following result in code violations. The scale was from 1 to 6, with 6 being the highest impact resulting in a code violation. The results are weighted averages per statement/event. The respondents felt that "workers ignoring the manufacturer's installation instructions" (4.81) was the greatest cause of code violations. This rating stands opposed to the relatively low cause rating of "inadequate manufacturer's installation instructions" (2.95). Lack of contractor code knowledge was the second most rated cause of code violations (4.75).

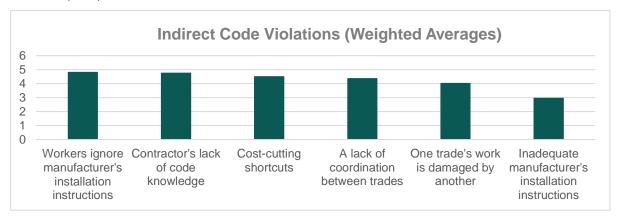

\*Note: 30% of respondents chose not to respond to this question.


February 2019 Page 31 of 46

## TYPES AND PERCENTAGES OF NEW HOMES WITH CODE VIOLATIONS

Based on their experience, respondents were asked to estimate by type and by percent how many new homes have code violations. If the respondents had no experience with the new home type, they were to leave the type of new home construction response blank. The number ratings could have ranged from 0 to 100%.

Of significance is that over 60% of respondents indicated that all types of new homes have code violations; those manufactured (61%) and even the custom high-end (88%) have code violations. The respondents' agreement on the highest new home type with code violations was the apartments, townhouses, condominiums grouping (90%).

#### \*No 2006 data available

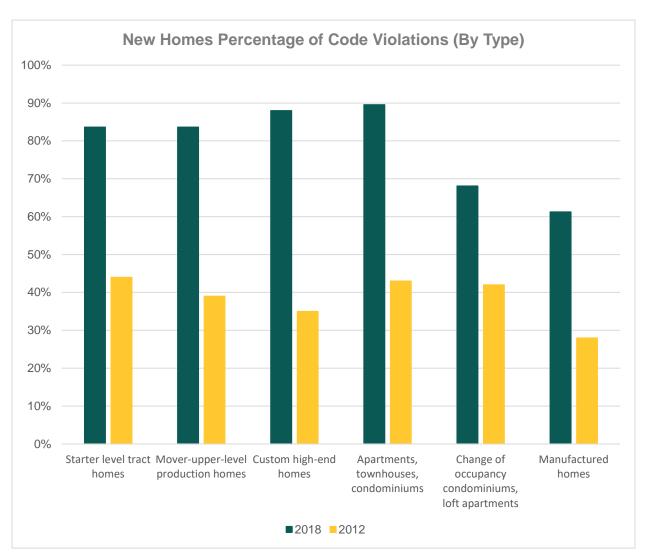

February 2019 Page 32 of 46



APPENDIX A - 2018 COMMON CODE NONCOMPLIANCE SURVEY

February 2019 Page 33 of 46





# International Code Council and National Association of Home Builders Common Code Noncompliance Survey

l.	Infor	mation on Code Officials and Building Code Departments
1.	Provid	le the state and zip code for your office location:
2.	Select	the number of years you have been in code enforcement:
		0-2 years
		3-5 years
		6-10 years
		11-15 years
		16 or more years
3.	Select	all ICC certifications that you currently hold:
		Master Code Professional
		Certified Building Official
		Certified Fire Marshal
		Commercial Building Inspector
		Commercial Electrical Inspector
		Commercial Mechanical Inspector
		Commercial Plumbing Inspector
		Commercial Energy Inspector
		IgCC Commercial Inspector
		Fire Inspector
		Residential Building Inspector
		Residential Electrical Inspector
		Residential Mechanical Inspector
		Residential Plumbing Inspector
		Residential Energy Inspector
		Building Plans Examiner
		Commercial Energy Plans Examiner
		Electrical Plans Examiner

February 2019 Page 34 of 46

Mechanical Plans ExaminerPlumbing Plans Examiner

□ Residential Plans Examiner

☐ Green Building-Residential Examiner

☐ Fire Plans Examiner

☐ IgCC Plans Examiner





	<ul> <li>Permit Technician</li> <li>Property Maintenance and Housing Inspector</li> <li>Zoning Inspector</li> <li>Special Inspector</li> <li>Other (please specify):</li> </ul>
4.	Which of the following choices best describes your position at your building department? (Select only one.)
	<ul> <li>Building Official</li> <li>Building Inspector</li> <li>Plan Reviewer</li> <li>Fire Official</li> <li>Fire Inspector</li> <li>Other (please specify):</li></ul>
5.	Which of the following choices best describes your department's level of authority?
	<ul> <li>□ City level</li> <li>□ County level</li> <li>□ State level</li> <li>□ Federal level</li> <li>□ Other (please specify):</li></ul>
6.	What is the approximate population of the jurisdiction in which you work?
	<ul> <li>□ Under 50,000</li> <li>□ 50,000 to 149,999</li> <li>□ 150,000 to 999,999</li> <li>□ 1,000,000 or more</li> </ul>
7.	Select from the following types of services provided by your department (Check all that apply.):
	<ul> <li>Pre-construction meetings</li> <li>Plan review</li> <li>Electronic plan submittal</li> <li>Field inspections</li> <li>Other (please specify):</li></ul>
8.	Does your building department allow plans, permit applications or other documents to be submitted electronically for review?

February 2019 Page 35 of 46





9	2012	2015	2018
IBC	□ IBC	□ IBC	□ IBC
ICCPC			
IEBC	□ IEBC	□ IEBC	□ IEBC
IECC	□ IECC	□ IECC	□ IECC
IFC	□ IFC	□ IFC	□ IFC
□ IFGC	□ IFGC	□ IFGC	□ IFGC
□ IgCC	□ IgCC	□ IgCC	□ IgCC
□ IMC	□ IMC	□ IMC	□ IMC
□ IPC	□ IPC	□ IPC	□ IPC
□ IPMC	□ IPMC	□ IPMC	□ IPMC
□ IPSDC	□ IPSDC	□ IPSDC	□ IPSDC
□ IRC	□ IRC	□ IRC	□ IRC
□ ISPSC	□ ISPSC	□ ISPSC	□ ISPSC
□ IWUIC		□ IWUIC	
		□ IZC	□ IZC
Other:			
☐ Foo	-Slab, isolated footings erior roof deck nailing (pr	e, waste and vent (plumb e-underlayment) , strapping and shear wal lment) alment)	C,

February 2019 Page 36 of 46





□ Drywa □ Insula □ Exteri □ Roof □ □ Buildi □ Energ □ Mech □ Plumb □ Electr □ Fire re □ Gradi □ Use a	r, drain, waste and vent to all inspection ation inspection or wall/roof flashing/WRE or wall lath/Cladding Ties Covering/Shingles/Tile ng Final py/Insulation Final anical/HVAC Final bing Final ical Final (Power Require esistance rated constructing/Site Drainage and Occupancy Inspection (please specify):	ed: Yes or No?)	
indicate the	e number of permits issu- percentage of time dedic uction (amounts should a	ated to commercia	
	% Commercial % Residential % Other		
12.On average,	how often are plans den	ied due to code vi	olations?
	Residential	Commercial	]
	□ 10%	□ 10%	
	□ 20%	□ 20%	
	□ 30%	□ 30%	
	□ 40%	□ 40%	
	□ 50%	□ 50%	
	□ 60%	□ 60%	
	□ 70%	□ 70%	
	□ 80%	□ 80%	
\ <b>'</b>	e specify):		
13. In what three	e (3) areas are plans mos	st often deficient?	
□ Occup	ral design pancy group/use designa ruction type and height/a		

February 2019 Page 37 of 46





14. On av	verage, how o	often are code viola	ation found during	g field inspections?
		Residential	Commercial	$\neg$
		□ 10%	□ 10%	
		□ 20%	□ 20%	
		□ 30%	□ 30%	
		□ 40%	□ 40%	
		□ 50%	□ 50%	
		□ 60%	□ 60%	
		□ 70%	□ 70%	
		□ 80%	□ 80%	
		cify):	ection most often	deficient?
		nce-rated construct a and plaster /	iion	

February 2019 Page 38 of 46





# II. Plumbing

		section does not apply to your job function, check this box and continue to ext section.
16	. Indica	te up to four (4) of the most common plumbing code violations you see:
		Hot and cold supply reversed Pipes improperly supported DWV pipes do not pass leakage test Inadequate or improperly installed venting Improper use of fittings (turns, tees, etc.) Cross connections and/or contamination Missing or inaccessible cleanouts Improper notching or boring of framing Inadequate slope or grade provided for waste lines Missing or improper nail plates Backflow device missing or not tested Pressure reducing valve not in place or set correctly Other (please specify):  If this section does not apply to your job function, check this box and continue to the next section.
17		te up to four (4) of the most common code violations you see in anical/fuel gas systems:
		Missing or inadequate equipment/duct size calculations Improper HVAC equipment size Improper duct size Improper venting of appliances Inadequate combustion air or makeup air Inadequate ventilation air Improperly installed ductwork Improperly notching or boring of framing Improper grounding or bonding of gas piping Gas pipe pressure test failed Inaccessible joint or valves on gas piping Inadequate clearance to combustibles Duct not insulated properly Other (please specify):

February 2019 Page 39 of 46





☐ If this section does not apply to your job function, check this box and continue to the next section.

			4 =	
	_	100	+ 10 1	$\sim$ $\sim$ 1
Ш.		ıec	,	cal

III.	Electrical
	If this section does not apply to your job function, check this box and continue to the next section.
18	Indicate up to four (4) of the most common electrical code violations you see:
	Overloaded circuit GFCI protection AFCI protection Incorrect outlet or switch location/spacing Labeling of circuits Fixture installation Working space/clearances Grounding/bonding issue Incorrect service panelboard installation Overfilled electrical boxes Receptacle is not tamper resistant Missing or improper nail plates Improper cable connections Other (please specify):  If this section does not apply to your job function, check this box and
<b>IV.</b>	continue to the next section.  Energy  Indicate up to four (4) most common energy code violations you see:
	<ul> <li>Improper sealing of exterior walls</li> <li>Improper air sealing of penetrations (e.g. electrical, ducts, venting)</li> <li>Improper insulation R-Values, wall/floors/ceiling/basement/slab/crawl</li> <li>Improper performance path calculations (e.g. ResCheck)</li> <li>Improper installation of insulation around wiring and plumbing passing through stud cavity</li> <li>Improper installation of insulation at ceiling joist at roof rafters</li> <li>Improper installation of insulation in crawl spaces and slab on grade insulation</li> <li>Improper U-factors/SHGC of windows</li> <li>Improper duct sealing (visual)</li> <li>Failed or missing duct tightness test</li> </ul>

February 2019 Page 40 of 46





		Improper duct insulation Insufficient high-efficiency lighting Other (please specify):
		If this section does not apply to your job function, check this box and continue to the next section.
V. E	xte	rior
		e select up to four (4) of the most common exterior deck related code ons you see:
		Improper or inadequate ledger connection to house Improper guardrail or handrail installation Failure to follow decking manufacturer instructions Improper joist, beam or post size Improper joist spacing Improper post anchorage or post footings Improper lateral support Other (please specify):
		If this section does not apply to your job function, check this box and continue to the next section.
VI. Li	ife :	Safety
	eas e:	e select up to four (4) of the most common life safety code violations you
		Improper or inadequate fire rating Inadequate fire sprinkler protection Improper installation of smoke alarms/detectors Improper installation of CO alarms/detectors Improper installation of fire blocking Improper installation of draftstopping Inadequate means of egress Incorrectly sized or missing emergency escape/rescue opening Missing or improper window fall protection Failure to install correct safety glazing in required hazardous locations Other (please specify):

February 2019 Page 41 of 46





☐ If this section does not apply to your job function, check this box and continue to the next section.

## VII. Additional Questions

in hor	Doors Windows Chimneys
	nost flashing violations you see related to problems with products, lation or both?
	Products Installation Both Not applicable
24. Selec	t up to four (4) of the most common grading and site drainage violations
you s	Grade too high
	Grading Backfilling
	Soil conditions
	Erosion control measures not in place  Downspouts/drainage controls
	Driveways
	Sidewalks

February 2019 Page 42 of 46





	Other (please specify):
	If this question does not apply to your job function, check this box and continue to the next question.
25. Select see:	up to four (4) of the most common foundation-related code violations you
	If this question does not apply to your job function, check this box and continue to the next question.  Incorrect footing depth Incorrect drain installation Incorrect fasteners for use below grade to attach plywood (i.e., wood foundations) Improper reinforcement or support of rebar Improper anchor bolts Improper foundation size Standing water/mud in footing or on rebar Missing vapor barrier Other (please specify):
	If this question does not apply to your job function, check this box and continue to the next question.
26. Select	up to four (4) of the most common wall-related framing violations you see:
	Stud cut or notched to an impermissible depth Missing fire-blocking Missing studs Missing hold-down, straps, etc. Improper spacing Installation of sheathing Installation of braced or shear walls Other (please specify):  If this question does not apply to your job function, check this box and continue to the next question.
27. Select	up to four (4) of the most common floor-related framing violations you see:
	Notches/holes in areas not permitted Missing anchor bolts Improperly installed sheathing

February 2019 Page 43 of 46





	Sheathing nails missing joist Wrong joist size Wrong joist grade Inadequate splices Other (please specify):
	If this question does not apply to your job function, check this box and continue to the next question.
28. Selec	t up to four (4) of the most common truss-related violations you see:
	Permanent bracing not installed
	If this question does not apply to your job function, check this box and continue to the next question.
29. Selec	t up to four (4) of the most common roof covering violations you see:
	Absence or incorrect type of underlayment Over-driving of nails through shingles Broken roof tiles Inadequate overlap of tiles shingles or asphalt Improper materials Improper course spacing Missing nails or fasteners Product not approved or listed Other (please specify): If this question does not apply to your job function, check this box and continue to the next question.
30. Selec	t up to three (3) of the most common window- or door-related code violation ee:
	Inadequate fire rating

February 2019 Page 44 of 46





	Footings Improper flashing Improper door weather-stripping Insulation rating Not properly fastened or installed Other (please specify):
	If this question does not apply to your job function, check this box and continue to the next question.
31. Selec see:	t up to three (3) of the most common handrail-related code violations you
	If this question does not apply to your job function, check this box and continue to the next question.  Not properly fastened or installed  Missing handrails  Improper graspable surface  Improper height or spacing  Other (please specify):
	If this question does not apply to your job function, check this box and continue to the next question.
32. Selec	t up to three (3) of the most common guard-related code violations you see:
	Guard opening too large Improper placing Not properly fastened or installed Missing guardrail Height criteria not met Other (please specify):
	If this question does not apply to your job function, check this box and continue to the next question.
33. Selec	t the three (3) most common stair-related code violations you see:
	Improper stair construction Stair rise and run violations Stair geometry issues Stair headroom Improper stair tread

February 2019 Page 45 of 46





	Other (please specify):
	If this question does not apply to your job function, check this box and continue to the next question.
_	a scale of 1 to 6 with 6 being the highest, please rate how often you feel of the following result in code violations.
	A lack of coordination between trades  One trade's work is damaged by another Inadequate manufacturer's installation instructions  Workers ignore manufacturer's installation instructions  Contractor's lack of code knowledge  Cost-cutting shortcuts
Enter which	r experience, what percent of each type of new home has code violations? a number for each between 0 and 100. Leave blank answer choices for you have no experience or do not know the answer. (Do not enter percent or decimal points.)
	Starter level tract homes  Mover-upper-level production homes  Custom high-end homes  Apartments, townhouses, condominiums  Change of occupancy condominiums, loft apartments  Manufactured homes

February 2019 Page 46 of 46